Installation Instructions A7557

Rating	75 lbs, Dynamic, 100 lbs. Static	Certification	ANSI: Grade 1

Type	A7557: Undermount, full extension, self opening, "Push"

Part number example: The length of the drawer slide = the length of the drawer box.		
	A7557/305	Drawer box length = 12" (305mm)
	A7557/381	Drawer box length = 15" (381mm)
	A7557/457	Drawer box length = 18" (457mm)
	A7557/533	Drawer box length = 21" (533mm)

1 Calculate the cabinet depth

Drawer box length	Minimum cabinet depth		Maximum cabinet depth
	With metal socket	With plastic socket	With metal or plastic rear socket
12"(305mm)	12 13/16" (326mm)	14 1/16" (357mm)	14 1/2" (369mm)
15"(381mm)	15 7/8" (403mm)	17 1/16" (434mm)	17 9/16" (446mm)
18"(457mm)	18 7/8" (479mm)	20 1/16" (510mm)	20 9/16" (522mm)
21"(533mm)	21 7/8" (555mm)	23 1/16" (586mm)	23 9/16" (598mm)

2 Calculating the drawer box size

Possible drawer side thickness	Minimum thickness	1/2" (13mm)
	Maximum thickness	5/8" (16mm)

Calculation for outside drawer width

Drawer side thickness	5/8" (16mm)	19/32" (15mm)	9/16" (14mm)	1/2" (13mm)	15/32" (12mm)
Deduct from opening size	3/8" (9mm)	7/16" (11mm)	1/2" (13mm)	5/8" (16mm)	21/32" (17mm)

Calculating maximum drawer height

If drawer bottom is recessed:	1/2" (13mm)	5/8" (15mm)
Deduct from opening for maximum possible drawer side height	1" (25mm)	7/8" (23mm)

Drawer bottom recess range	Possible range: From 3/8" (10mm) to 9/16" (15mm)

3 Machine back notch & assembly hook hole (1/4" (6mm)) hole as shown.

4 Assemble front mounting clips as shown. Left and right

6 way adjustable front mounting clips: reft and right pair	A750.010

5 Assemble rear mounting socket (if applicable) as shown. Metal or plastic.

Plastic Socket - Screw	A6975000604100	Metal Socket	AGSKXX5
Plastic Socket - Dowel	A6975000604120		

6 Assemble drawer slide to cabinet. Note: Important 5/32" (4mm) setback from cabinet front edge. Drawer slide accepts # 6 wood screws or 6mm Euro screws.

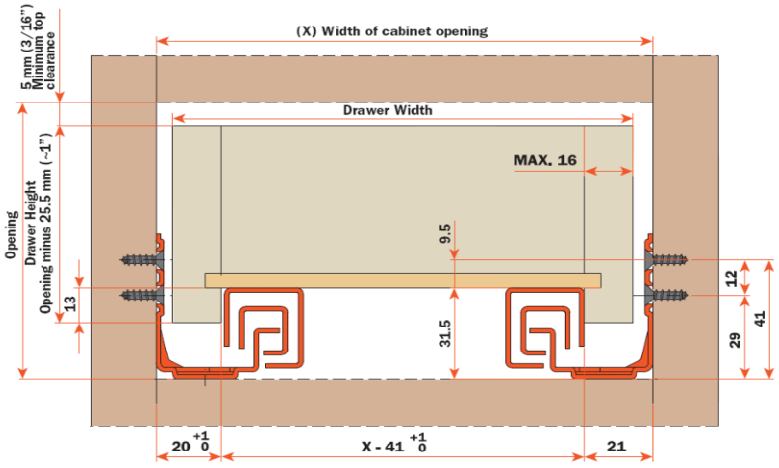

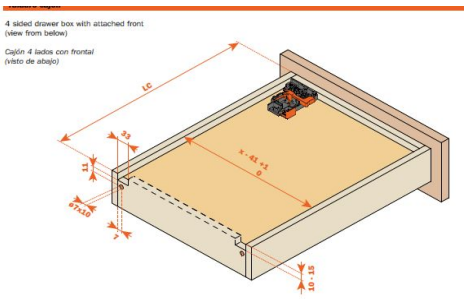

Drawer back detail



Front clip detail



6x Adjustments

Height adjustment

Lateral adjustment

Depth adjustmen

5/32" (4mm) set back from edge



Location of the slide from the front edge of the cabinet

Metal rear socket position