

EASY GLIDE ALUMINUM TRACK ASSEMBLY FOR 1/4" GLASS DOORS

26609 - 36"
26617 - 48"

26609-617


FEATURES:

- aluminum extrusions are clear anodized
- for silent effortless sliding glass doors
- readily adaptable to many size panels
- each set includes all necessary hardware for installing one pair of doors
- set includes extruded aluminum channel guide, lower track, and shoes. Clip guide grips, nylon rollers and vinyl glazing are also included
- instructions for easy and quick installation are included
- for 1/4" thick glass doors
- doors can be instantly removed for cleaning

APPLICATIONS:

Designed for effortless and noiseless rolling of 1/4" glass doors.


INSTALLATION:

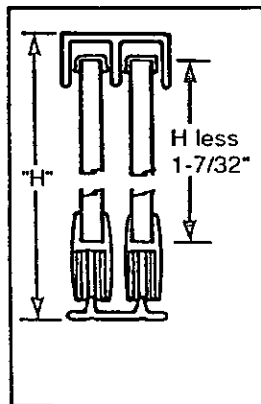


723-1
ASSEMBLY

NOTE: Glass height should be 1-7/32" less than finished cabinet opening height.


CAUTION: When using safety glass, do not use the glazing vinyl as this will make too tight a fit and the glass will break.

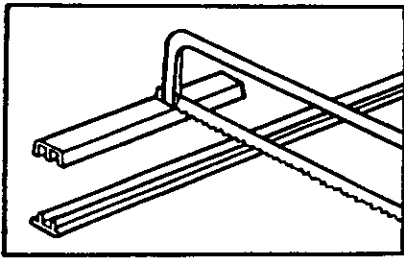


1. Using a standard hack saw with a fine tooth blade, cut the top and bottom tracks to the desired width of the opening.

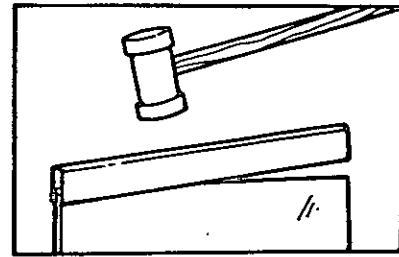


5. Apply glazing vinyl to bottom of panel. With a rubber mallet or hammer and block of soft wood carefully pound shoe molding over glazing vinyl onto bottom of panels.

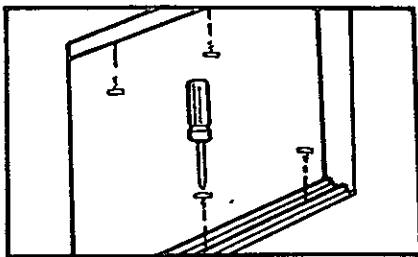


2. Pre-drill the top and bottom tracks with a 3/32" drill. Put tracks in place and screw in place with #3 x 1/2 screws furnished.

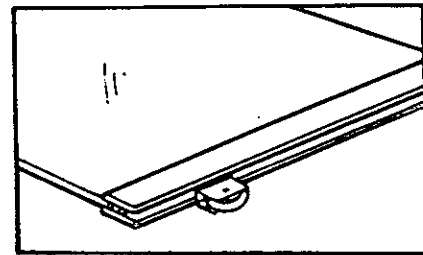


6. Push in wheels 1 to 3 inches from each end. On larger or heavier panels additional wheels may be required.

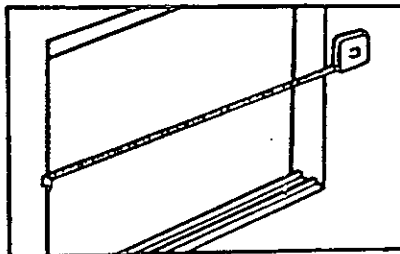


3. Again double check width of opening before cutting sliding door panels. Whatever amount of overlap is desired, add to the overall width - 1" is standard.

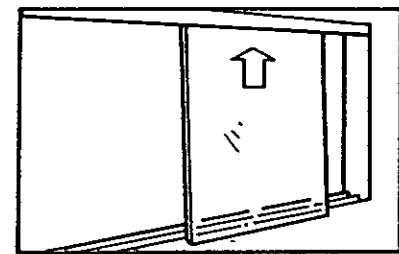


7. Insert panels into the top first, then swing bottom in making sure wheels are centered on track ridge.

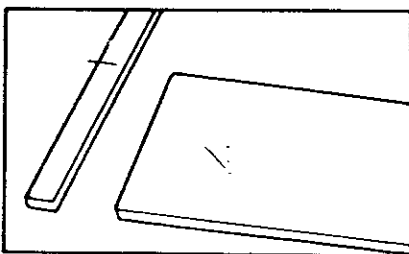

4. Cut shoe molding to length of opening, plus overlay amount. Then cut molding in half. You now have the width of the panels. The formula for the height of the panels is: rough opening height minus 1-7/32".

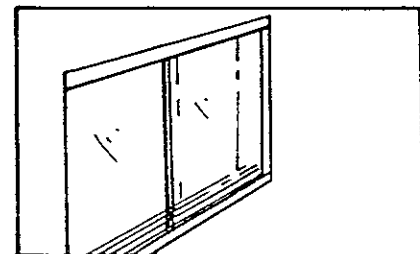


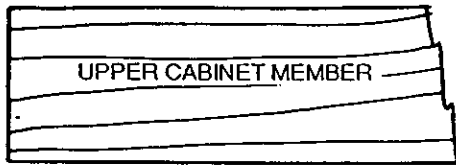


ASSEMBLY

26609-617


SPECIFICATIONS:

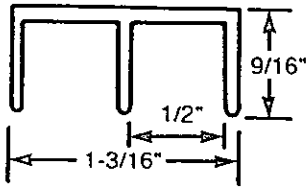


Channel for use as upper guide

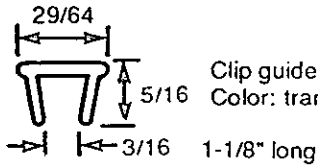


Clip guide grips edge of glass and silences operation.
Color: translucent

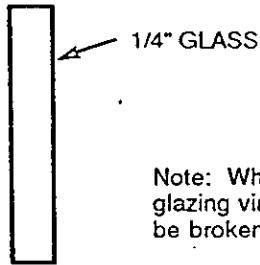


Note: When using safety glass - do not use the glazing vinyl as it is too tight and the glass could be broken.




Glazing vinyl for 1/4" mirrors or glass. Gray only.

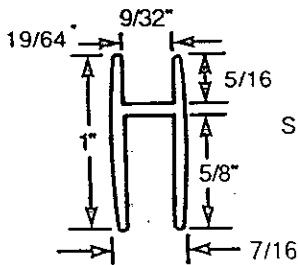

Shoe for use with track and roller

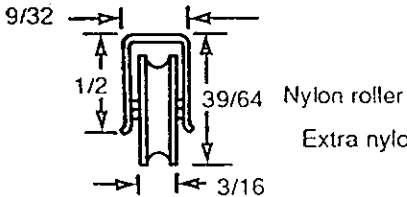

Nylon roller
Extra nylon rollers are available.

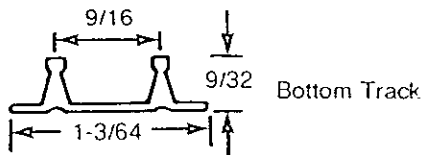

Bottom Track

