


Canvas-free Tambour

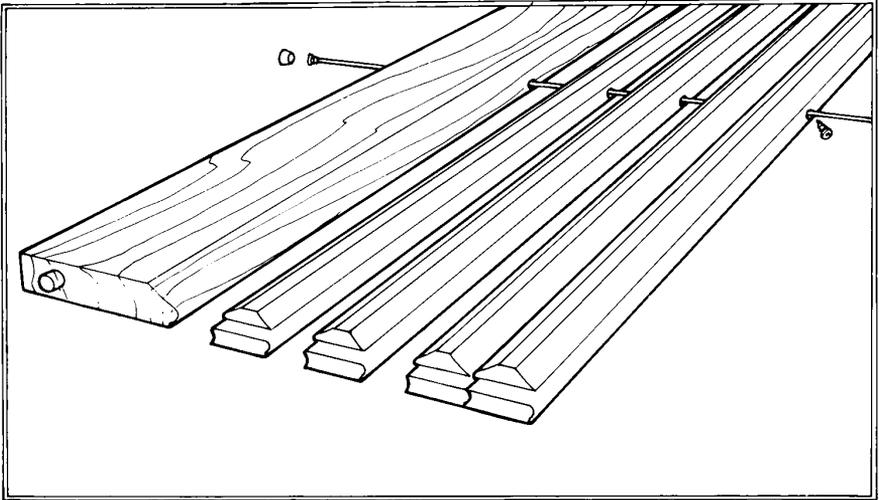

Installation

- 1.) Rout 3/8" wide x 7/16" deep grooves for the tambour track.
- 2.) Cut the lead strip to length so that it spans the desk or cabinet opening (not including the track depth). Use a doweling jig to drill 3/8" diameter x 1 1/8" deep holes centered in the ends of the lead strip. Glue a 3/8" x 1 1/2" dowel into each hole.
- 3.) Cut the slats to a length 3/4" more than the lead strip. Removing material on the front face at each end of the slats, create 5/16" thick x 3/8" long tenons.
- 4.) Finish all tambour before assembly.
- 5.) Thread cables through the lead strip and all the slats. Pull the cables tight and secure them by driving wood screws alongside the cables in the last slat. Plug the lead strip cable holes with 1/4" diameter dowels.

62331
62315
81349



Create with Confidence™

© Rockler Companies Inc. 2006

RTD10300814AA