


6' CD/DVD Tower

CD TOWER MATERIALS LIST

| | T x W x L | Qty. |
|--------------------|-------------------------|------|
| 1 Side Panels | 3/4" x 5 1/4" x 73 1/2" | 2 |
| 2 Back Panel | 1/4" x 5 3/4" x 73 1/2" | 1 |
| 3 Top Panel | 3/4" x 5" x 5" | 1 |
| 4 Base Panel | 3/4" x 5" x 5" | 1 |
| 5 Top Molding | 3/4" x 8" x 8" | 1 |
| 6 Base Molding | 3/4" x 8" x 8" | 1 |
| 7 Base | 3/4" x 11" x 11" | 1 |
| 8 6' Holder Strips | (35434) | 2 |

DVD TOWER MATERIALS LIST

| | T x W x L | Qty. |
|--------------------|-------------------------|------|
| 1 Side Panels | 3/4" x 5 1/4" x 73 1/2" | 2 |
| 2 Back Panel | 1/4" x 8 1/8" x 73 1/2" | 1 |
| 3 Top Panel | 3/4" x 7 5/8" x 5" | 1 |
| 4 Base Panel | 3/4" x 7 5/8" x 5" | 1 |
| 5 Top Molding | 3/4" x 10 5/8" x 8" | 1 |
| 6 Base Molding | 3/4" x 10 5/8" x 8" | 1 |
| 7 Base | 3/4" x 13 5/8" x 11" | 1 |
| 8 6' Holder Strips | (38094) | 2 |

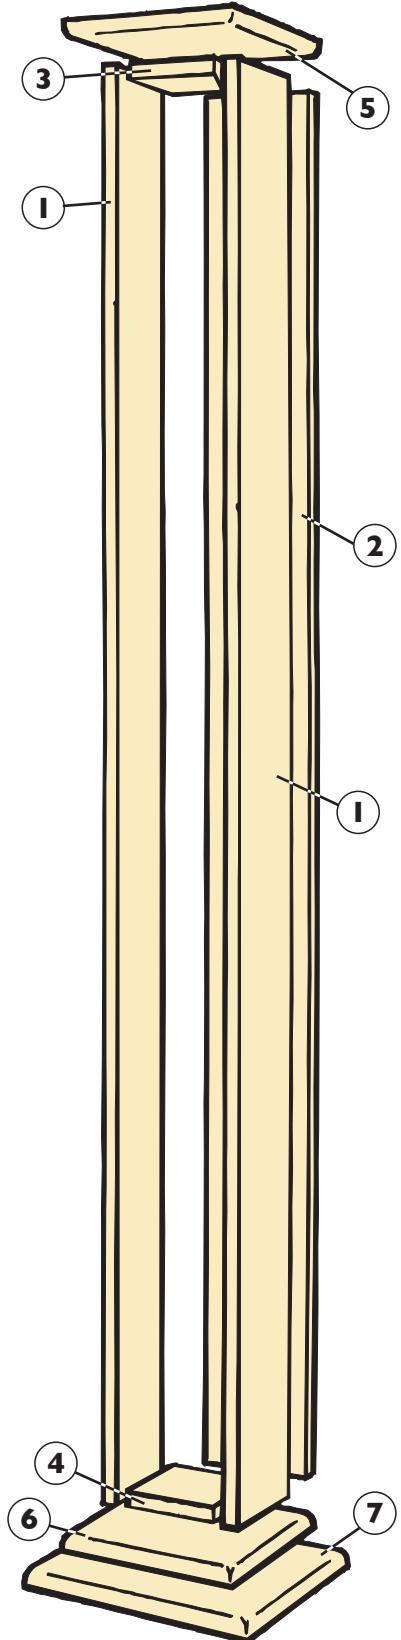

Instructions:

This tower stands 75 3/4" overall and is designed to hold both CDs or DVDs using Rockler CD (35434, sold separately) or DVD (38094, sold separately) strips.

1. Cut all of the materials as listed in the materials list below. On the Side Panels (1) cut a 3/8" wide by 1/4" deep rabbet. **Fig. 1**. On the Top Molding (5), Base Molding (6) and Base (7) route a decorative edge as desired.
2. Construct the main "box" using Side Panels (1), Back Panel (2), Top Panel (3) and Base Panel (4) as indicated in the exploded view of this plan. Join the corner with glue and nails or plugged screws, dowels or biscuits. Apply Top Molding (5), Base Molding (6) and Base (7). **Fig. 2**.
3. Finish as desired.
4. Apply CD or DVD strips flush (8) with front edge.

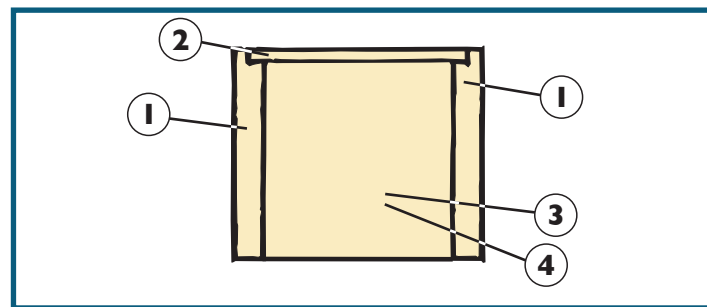


Fig. 1

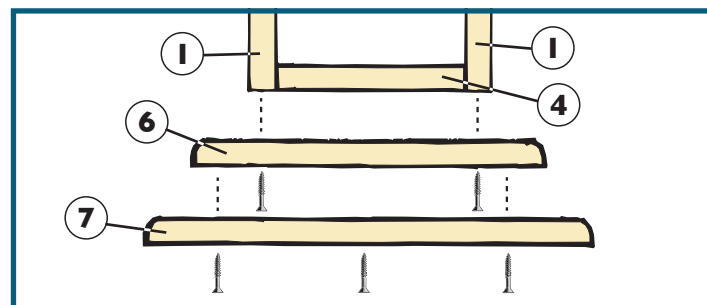


Fig. 2

